

## 1SS400

### Surface Mount Switching Diodes

#### Features

- Extremely High Switching Speed
- Low Reverse Leakage Current
- High Reliability
- Small Outline Surface Mount SOD-523 Package
- RoHS compliant package

#### Applications


- High speed switching

#### Packing & Order Information

3,000/Reel




**RoHS  
COMPLIANT**

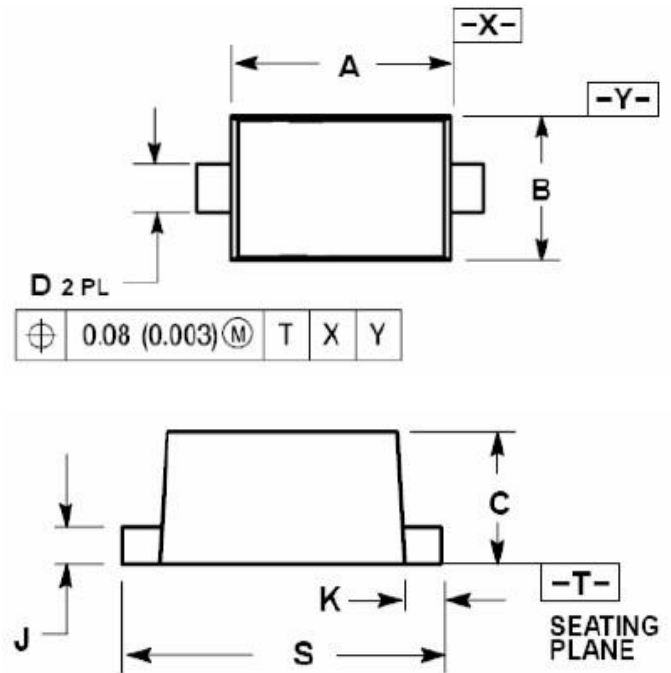

Dim	Millimeters			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.10	1.20	1.30	0.043	0.047	0.051
B	0.70	0.80	0.90	0.028	0.032	0.035
C	0.50	0.60	0.70	0.020	0.024	0.028
D	0.25	0.30	0.35	0.010	0.012	0.014
J	0.07	0.14	0.20	0.0028	0.0055	0.0079
K	0.15	0.20	0.25	0.006	0.008	0.010
S	1.50	1.60	1.70	0.059	0.063	0.067

#### Graphic symbol



### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum Ratings (Tc=25°C unless otherwise noted)

Parameter	Symbol	ISS400	Unit
Maximum Peak Reverse Voltage	VRM	90	V
Maximum DC Reverse Voltage	VR	80	V
Maximum Average Forward Current	IF(AR)	100	mA
Peak Forward Surge Current@t=1S	IFSM	500	mA
Operating Junction Temperature Range	TJ	125	°C
Storage temperature range	TSTG	40 to +125	°C

## 1SS400

### Surface Mount Switching Diodes

#### Electrical characteristics (Tc=25°C unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage (IR=100μA)	V(BR)R	80	--	--	V
Forward Voltage IF=100mA	VF	--	--	1.2	V
Reverse Current VR=80V	IR	--	--	0.1	μA
Capacitance between terminals VR=0.5V, f=1MHZ	CT	--	--	3.0	pF
Reverse Recovery Time VR=6V, IF=10mA,RL=100Ω	Trr	--	--	4.0	ns

#### Device marking

PART	MARK
1SS400	A4

## 1SS400

### Surface Mount Switching Diodes

#### ■ RATING AND CHARACTERISTIC CURVES

<p>FIG.1- FORWARD CHARACTERISTICS</p>	<p>FIG.2- REVERSE CHARACTERISTICS</p>
<p>FIG.3- CAPACITANCE BETWEEN TERMINALS</p>	<p>FIG.4- REVERSE RECOVERY TIME CHARACTERISTICS</p>
<p>FIG.5- SURGE CURRENT CHARACTERISTIC</p>	<p>FIG.6- REVERSE RECOVERY TIME (TRR) MEASUREMENT CIRCUIT</p>

## 1SS400

### Surface Mount Switching Diodes

#### Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE

WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.