

ESD3ZxxC

Transient Voltage Suppressors for ESD Protection

Description

The ESD3ZxxC is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.

Features

- Small Body Outline Dimensions
- Low Body Height
- Peak Power up to 350 Watts @ 8 x 20 μ s Pulse
- Low Leakage current
- Response Time is Typically < 1 ns
- ESD Rating of Class 3 (> 16 kV) per Human Body

Model

- RoHS compliant package

Complies with the following standards

IEC61000-4-2

Level 4 15 kV (air discharge)

8 kV(contact discharge)

MIL STD 883E - Method 3015-7 Class 3



25 kV HBM (Human Body Model)

Applications:

- Cellular phones
- Portable devices
- Digital cameras
- Power supplies

Packing & Order Information

Shipping : 3,000/Reel

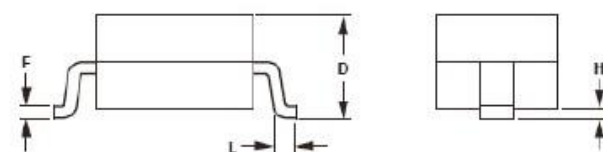


OUTLINE DIMENSIONS				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.60	1.90	0.063	0.075
B	1.15	1.45	0.045	0.057
C	2.39	2.70	0.094	0.106
D	0.80	1.10	0.031	0.043
E	0.25	0.40	0.010	0.016
F	0.10	0.20	0.004	0.008
H	-	0.10	-	0.004
L	0.20	-	0.008	-

NOTES

1. Controlling dimension: millimeters.
2. Dimensioning and tolerances per ANSI Y14.5M, 1985.
3. Dimensions are exclusive of mold flash and metal burrs.

Graphic symbol



RoHS
COMPLIANT

ESD3ZxxC

Transient Voltage Suppressors for ESD Protection


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Absolute ratings ($T_{amb}=25^{\circ}\text{C}$)


Symbol	Parameter	Value	Unit
Ppk	Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	350	W
T_L	Maximum lead temperature for soldering during 10s	260	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-55 to +150	$^{\circ}\text{C}$
TOP	Operating Temperature Range	-40 to +125	$^{\circ}\text{C}$
T_J	Maximum junction temperature	150	$^{\circ}\text{C}$

Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

Part Numbers	VBR			IT	VRWM	IR	Cj TYP(Note1) PF
	Min.	Typ.	Max.				
	V	V	V		V	μA	
ESD3Z5C	5.4	6.7	7.8	1	5.0	1	25
ESD3Z12C	13.3	14.5	15.7	1	12.0	1	35
ESD3Z15C	16.7	18.0	19.0	1	15.0	1	50

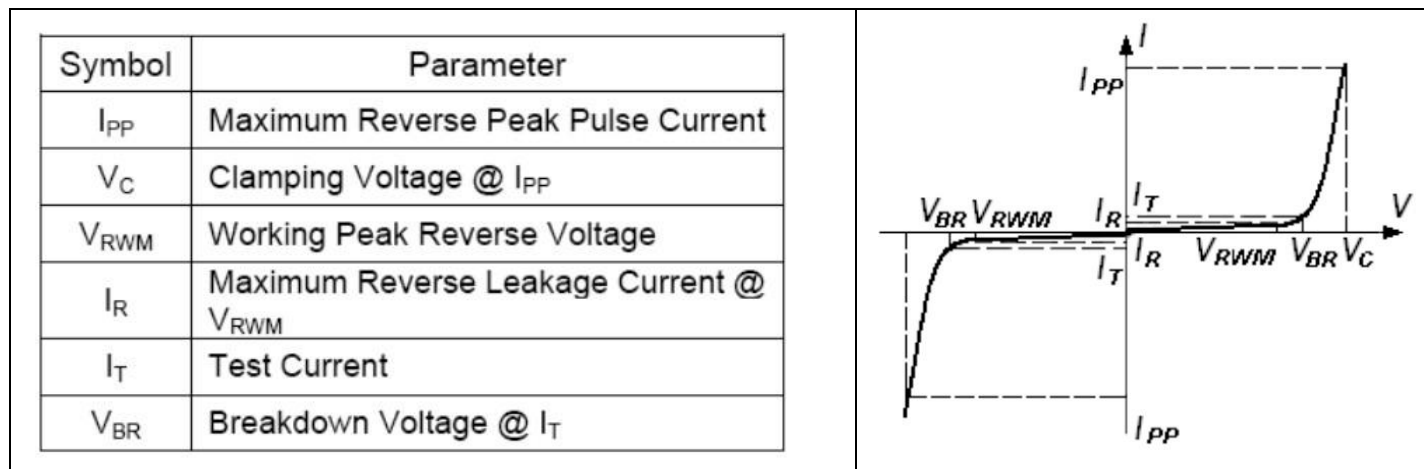

Typical Characteristics

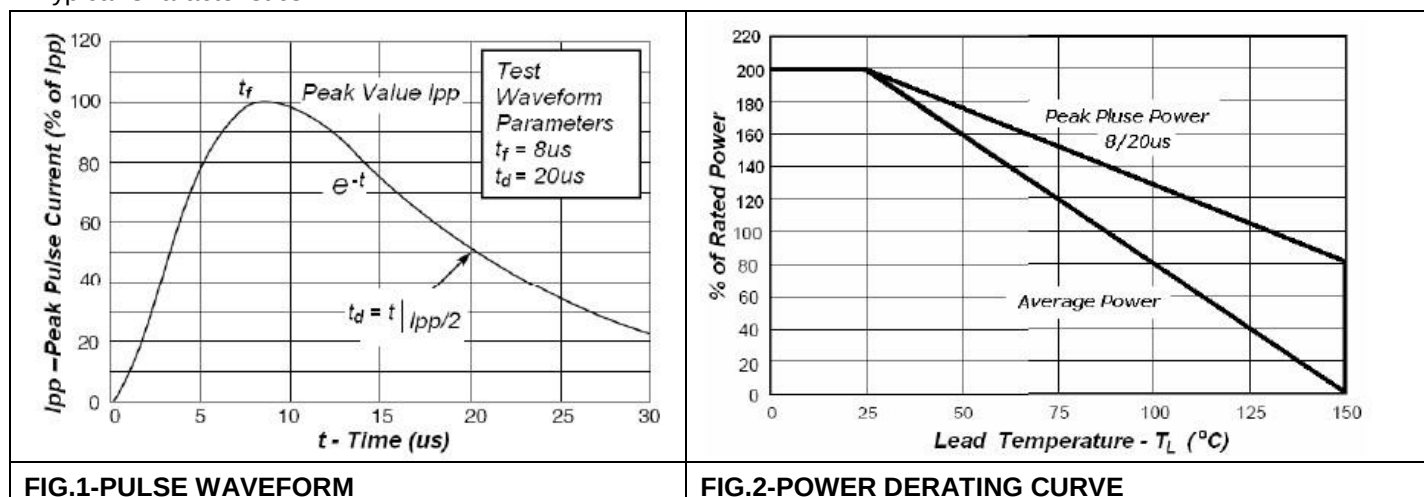

ESD3ZxxC

Transient Voltage Suppressors for ESD Protection

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.