

MS 10N80

800V N-Channel MOSFET

Description

The MS10N80 is a N-channel enhancement-mode MOSFET, providing the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost effectiveness. The TO-220AB package is universally preferred for all commercial-industrial applications

Features

- Originative New Design
- Very Low Intrinsic Capacitances
- Excellent Switching Characteristics
- Unrivalled Gate Charge : 46nC (Typ.)
- Extended Safe Operating Area
- Lower RDS(ON) : 1.10 Ω (Typ.) @VGS=10V
- 100% Avalanche Tested
- RoHS compliant package


Package type : TO-220AB

Packing & Order Information


50/Tube ; 1,000/Box



**RoHS
COMPLIANT**

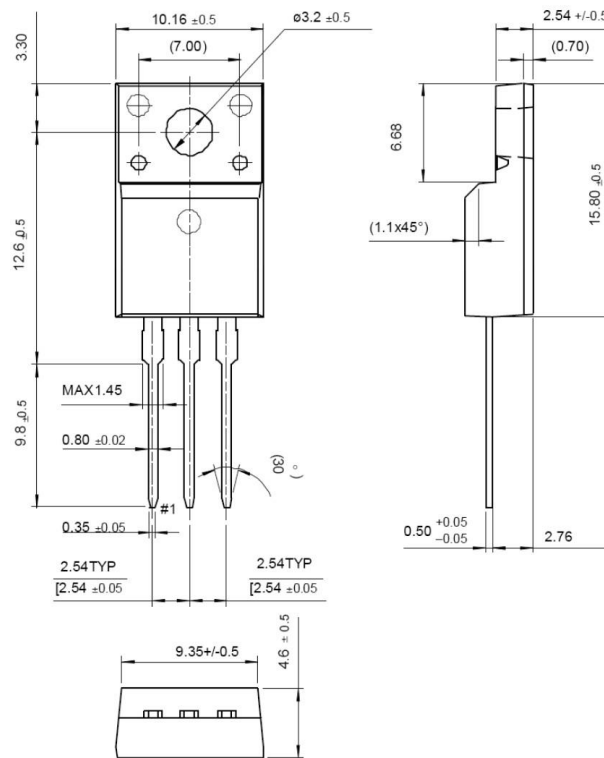

Graphic symbol



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings (Tc=25°C unless otherwise specified)

Symbol	Parameter	Value	Unit
V _{DSS}	Drain-Source Voltage	800	V
V _{GS}	Gate-Source Voltage	±30	V
I _D	Drain Current -Continuous (TC=25°C)	10	A
	Drain Current -Continuous (TC=100°C)	6.5	A
I _{DM}	Drain Current Pulsed	40	A
E _{AS}	Single Pulsed Avalanche Energy	960	mJ
E _{AR}	Repetitive Avalanche Energy	24	mJ
I _{AR}	Avalanche Current	9.2	A
dv/dt	Peak Diode Recovery dv/dt	4.0	V/ns
P _D	Total Power Dissipation(@TC = 25 °C)	60	W
	Derating Factor above 25 °C	0.48	W/°C

MS10N80

800V N-Channel MOSFET

Absolute Maximum Ratings (Tc=25°C unless otherwise specified)

Symbol	Parameter	Value	Unit
T _J , T _{STG}	Operating and Storage Temperature Range	-55 to +150	°C
T _L	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	300	°C

- Drain current limited by maximum junction temperature

Thermal Resistance Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Units
R _{θJC}	Junction-to-Case	--	--	1.43	°C/W
R _{θJA}	Junction-to-Ambient	--	--	62.5	

On Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
V _{GS}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _D = 250μA	3.0	--	5.0	V
R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} = 10 V, I _D = 5.0 A	--	1.7	2.1	Ω

Off Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0 V, I _D = 250μA	800	--	--	V
ΔBV _{DSS} /ΔT _J	Breakdown Voltage Temperature Coefficient	I _D = 250μA, Referenced to 25°C	--	1.0	--	V/°C
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 800 V, V _{GS} = 0 V V _{DS} = 640 V, T _C = 125°C	--	--	10 100	μA
I _{GSSF}	Gate-Body Leakage Current, Forward	V _{GS} = 30 V, V _{DS} = 0 V	--	--	100	nA
I _{GSSR}	Gate-Body Leakage Current, Reverse	V _{GS} = -30 V, V _{DS} = 0 V	--	--	-100	nA

Dynamic Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
C _{ISS}	Input Capacitance	V _{DS} = 25 V, V _{GS} = 0 V, f = 1.0MHz	--	2200	--	pF
C _{OSS}	Output Capacitance		--	190	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	20	--	pF
t _{d(on)}	Turn-On Time	V _{DS} = 400 V, I _D = 7 A, R _G = 25 Ω	--	60	--	ns
t _r	Turn-On Time		--	150	--	ns
t _{d(off)}	Turn-Off Delay Time		--	110	--	ns
t _f	Turn-Off Fall Time		--	90	--	ns

MS 10N80

800V N-Channel MOSFET

Dynamic Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
Q_g	Total Gate Charge	$V_{DS} = 640 \text{ V}, I_D = 10 \text{ A},$ $V_{GS} = 10 \text{ V}$	--	46	--	nC
Q_{gs}	Gate-Source Charge		--	15	--	nC
Q_{gd}	Gate-Drain Charge		--	20	--	nC

Source-Drain Diode Maximum Ratings and Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
I_S	Continuous Source-Drain Diode Forward Current		--	--	10	A
I_{SM}	ISM Pulsed Source-Drain Diode Forward Current		--	--	40	
V_{SD}	Source-Drain Diode Forward Voltage	$I_S = 7 \text{ A}, V_{GS} = 0 \text{ V}$	--	--	1.4	V
t_{rr}	Reverse Recovery Time	$I_S = 7 \text{ A}, V_{GS} = 0 \text{ V}$	--	730	--	ns
Q_{rr}	Reverse Recovery Charge	$diF/dt = 100 \text{ A}/\mu\text{s}$	--	12	--	μC

Notes;

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. $L=18\text{mH}, I_{AS}=10\text{A}, V_{DD}=5\text{V}, R_G=25\ \Omega$, Starting $T_J=25^\circ\text{C}$
3. $I_{SD} \leq 7\text{A}, di/dt \leq 200\text{A}/\mu\text{s}, V_{DD} \leq BV_{DSS}$, Starting $T_J=25^\circ\text{C}$
4. Pulse Test: Pulse Width $\leq 300\ \mu\text{s}$, Duty Cycle $\leq 2\%$
5. Essentially Independent of Operating Temperature

MS 10N80

800V N-Channel MOSFET

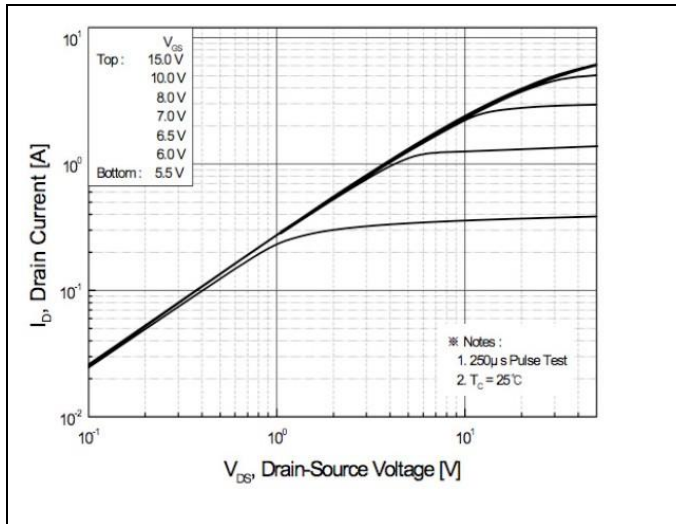


FIG. 1 - ON REGION CHARACTERISTICS

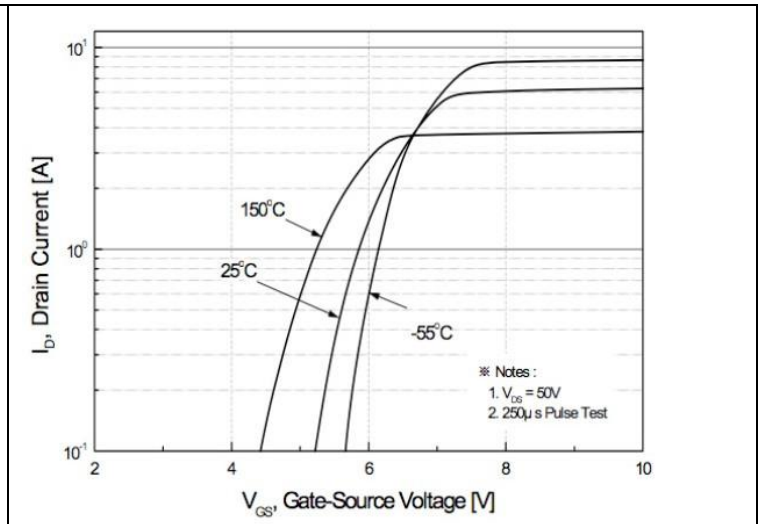


FIG. 2 - TRANSFER CHARACTERISTICS

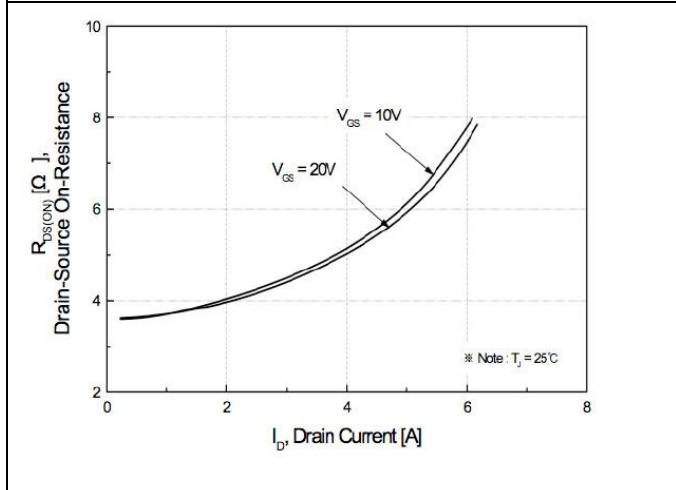


FIG. 3 - ON RESISTANCE VARIATION VS DRAIN CURRENT AND GATE VOLTAGE

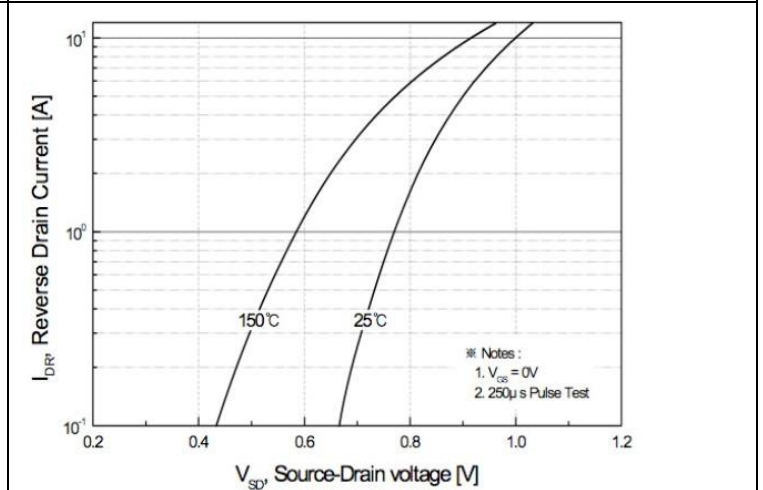


FIG. 4 - BODY DIODE FORWARD VOLTAGE VARIATION WITH SOURCE CURRENT AND TEMPERATURE

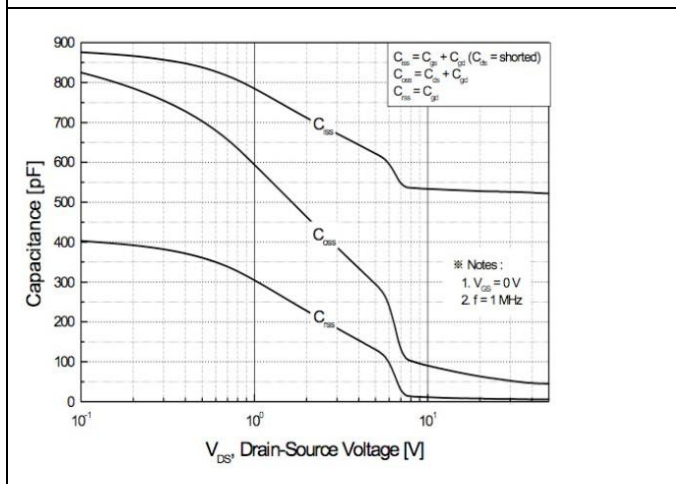


FIG. 5 - CAPACITANCE CHARACTERISTICS


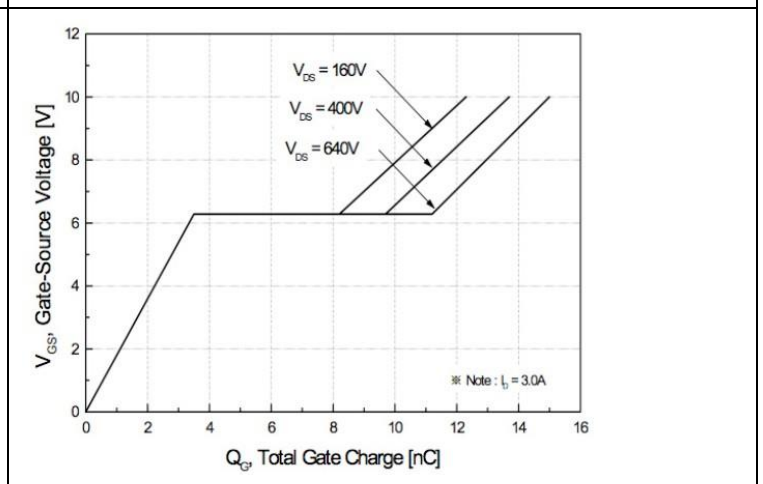


FIG. 6 - GATE CHARGE CHARACTERISTICS

MS 10N80

800V N-Channel MOSFET

■ Characteristics Curve

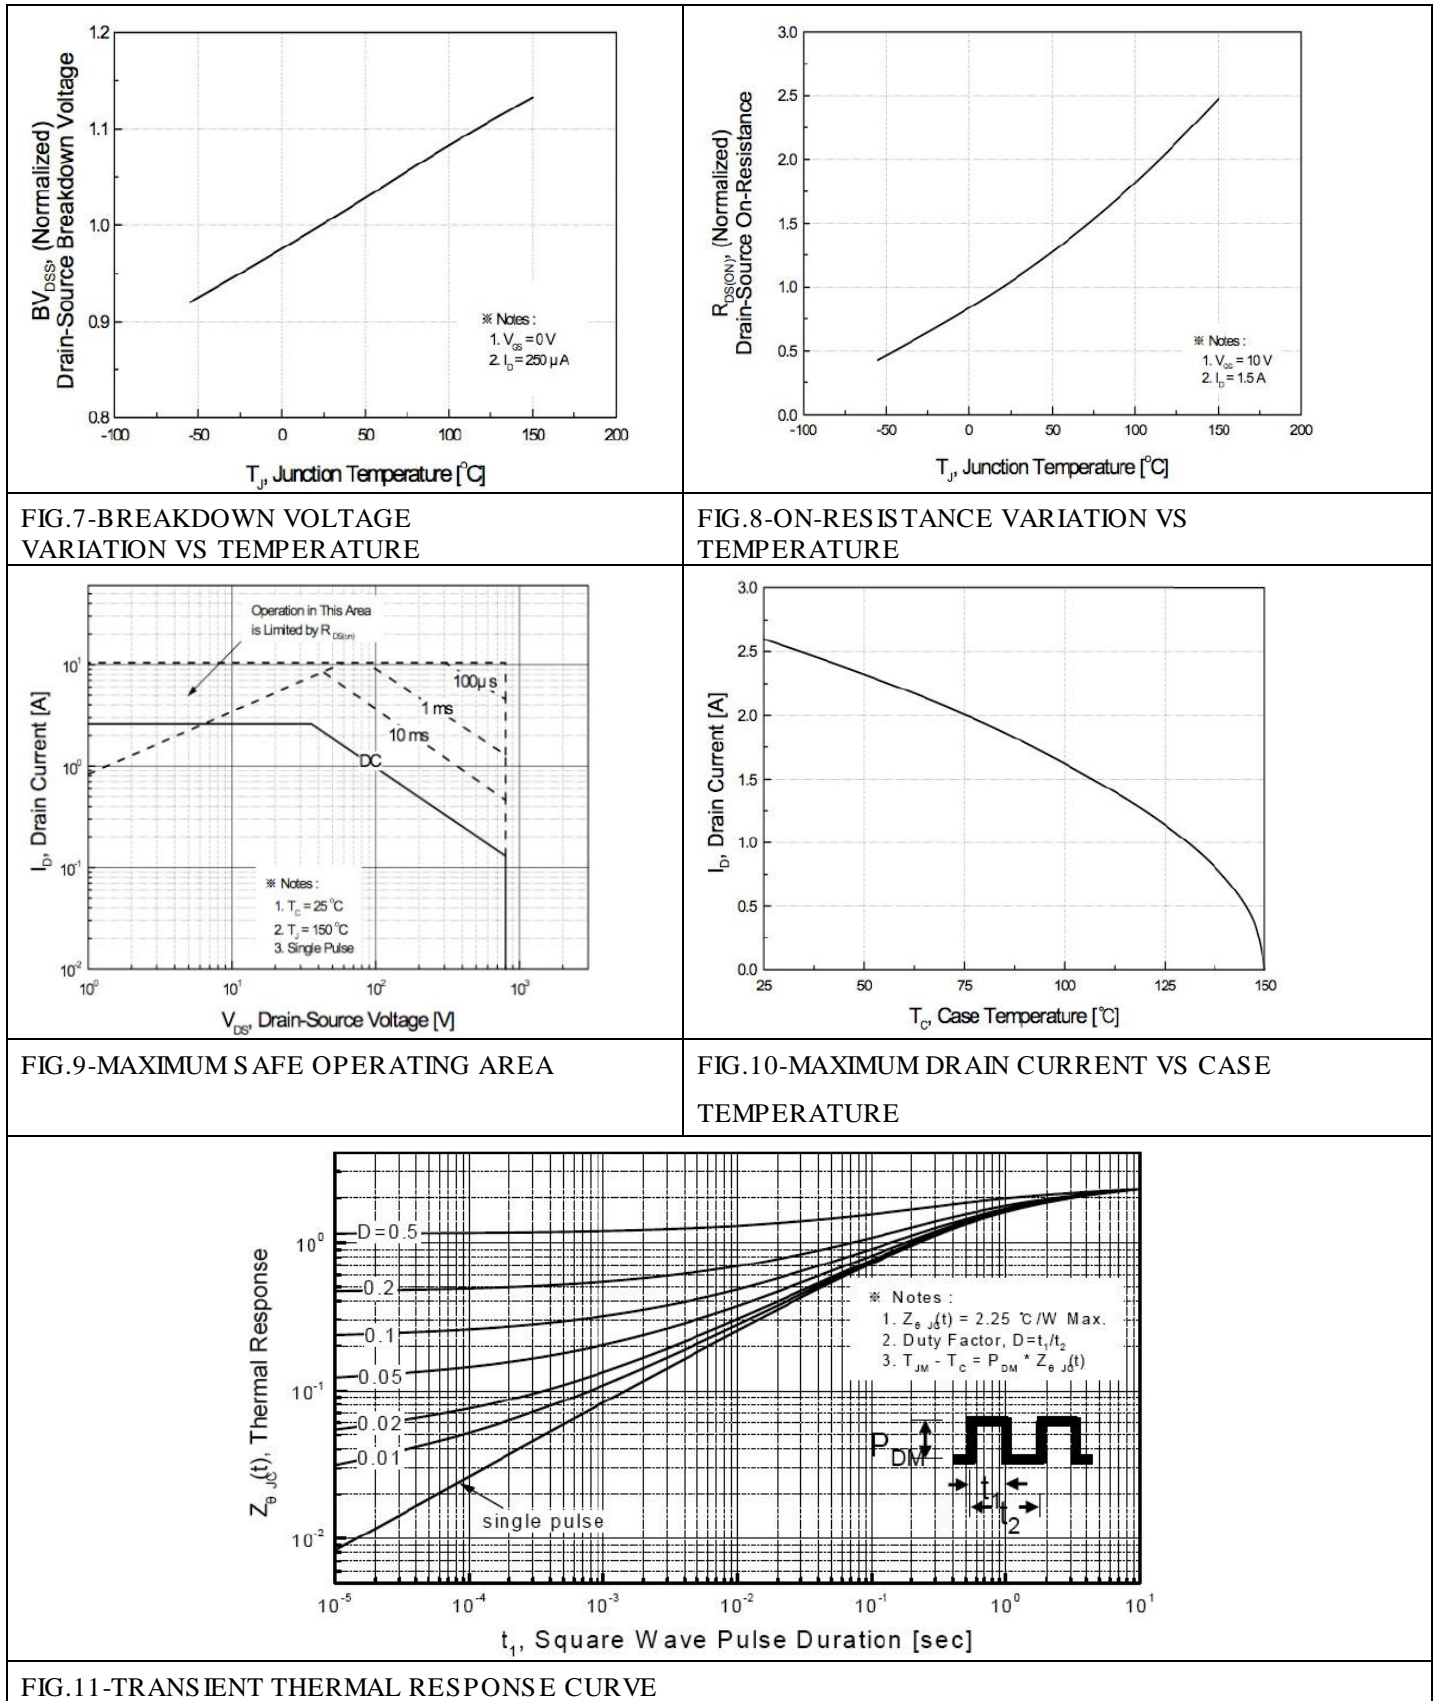

MS 10N80

800V N-Channel MOSFET

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE

WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.