

MSC49N02X

N-Channel 40V MOSFETs

Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

Features

- 40V, 140A, $R_{DS(ON)} = 2.2\text{m}\Omega @ V_{GS} = 10\text{V}$
- Improved dv/dt capability
- Fast switching

- Green Device Available
- RoHS compliant package


Applications

- PowerTools
- Load Switch
- LED applications
- Motor Drive Applications


Package type : DFN5X6-8L

Packing & Order Information

3.000/Reel




**RoHS
COMPLIANT**

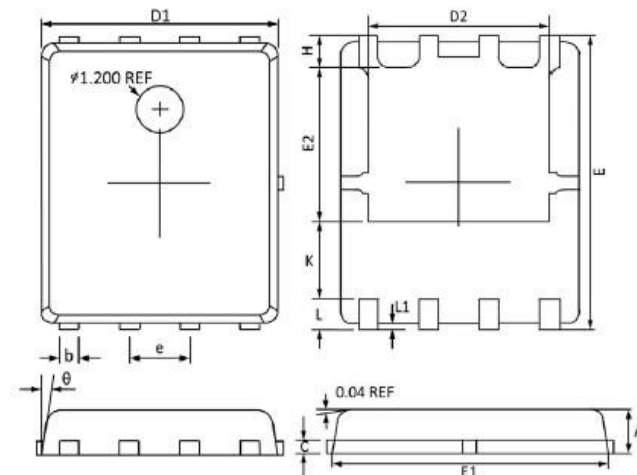

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	1.100	0.800	0.043	0.031
b	0.510	0.330	0.020	0.013
C	0.300	0.200	0.012	0.008
D1	5.100	4.800	0.201	0.189
D2	4.100	3.610	0.161	0.142
E	6.200	5.900	0.244	0.232
E1	5.900	5.700	0.232	0.224
E2	3.780	3.350	0.149	0.132
e	1.27BSC		0.05BSC	
H	0.700	0.410	0.028	0.016
K	1.500	1.100	0.059	0.043
L	0.710	0.510	0.028	0.020
L1	0.200	0.060	0.008	0.002
θ	12°	0°	12°	0°

Graphic symbol



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{DS}	Drain-Source Voltage	40	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current - Continuous ($T_C=25^\circ\text{C}$) (Chip Limitation)	140	A
	Drain Current - Continuous ($T_C=100^\circ\text{C}$) (Chip Limitation)	88	A
I_{DM}	Drain Current - Pulsed ¹	560	A
EAS	Single Pulse Avalanche Energy ²	360	mJ

MSC49N02X

N-Channel 40V MOSFETs

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
I _{AS}	Single Pulse Avalanched Current ²	85	A
P _D	Power Dissipation ($T_C=25^\circ\text{C}$)	142	W
	Power Dissipation - Derate above 25°C	1.14	W/°C
T _J	Operating Junction Temperature Range	-55 to +150	°C
T _{STG}	Storage Temperature Range	-55 to +150	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Units
R _{θJA}	Thermal Resistance Junction to ambient	--	62	°C/W
R _{θJC}	Thermal Resistance Junction to Case	--	0.88	

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Off Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
BV _{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = V_{GS}, I_D = 250\mu\text{A}$	40			V
I _{GSS}	Gate-Source Leakage Current	$V_{DS} = 0\text{ V}, V_{GS} = \pm 20\text{ V}$			±100	nA
I _{DSS}	Drain-Source Leakage Current	$V_{DS} = 40\text{ V}, V_{GS} = 0\text{ V}, T_J = 25^\circ\text{C}$			1	uA
		$V_{DS} = 32\text{ V}, V_{GS} = 0\text{ V}, T_J = 125^\circ\text{C}$			10	

On Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
R _{DS(on)}	Drain-Source On-Resistance	$V_{GS} = 10\text{ V}, I_D = 30\text{ A}$ $V_{GS} = 4.5\text{ V}, I_D = 20\text{ A}$		1.7 2.1	2.2 3	mΩ
V _{GS(th)}	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$	1.2	1.6	2.5	V
g _{fs}	Forward Transconductance	$V_{DS} = 10\text{ V}, I_S = 10\text{ A}$		45		S

Dynamic and switching Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
Q _g	Total Gate Charge ^{3,4}	$V_{DS} = 20\text{ V}, I_D = 10\text{ A},$ $V_{GS} = 4.5\text{ V}$	--	70	140	nC
Q _{gs}	Gate-Source Charge ^{3,4}		--	15	32	nC
Q _{gd}	Gate-Drain Charge ^{3,4}		--	40	80	nC
C _{ISS}	Input Capacitance	$V_{DS} = 25\text{ V}$ $f = 1\text{ MHz}, V_{GS} = 0\text{ V}$	--	8000	12000	pF
C _{OSS}	Output Capacitance		--	550	1000	pF
C _{RSS}	Reverse Transfer Capacitance		--	420	800	pF
R _g	Total Gate Charge		$V_{DS} = 0\text{ V}, f = 1\text{ MHz}, V_{GS} = 0\text{ V}$	--	1.2	2.4

MSC49N02X

N-Channel 40V MOSFETs

Dynamic and switching Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
$t_{d(on)}$	Turn-On Delay Time ^{3,4}	$I_D = 10\text{ A}$, $R_G = 10\ \Omega$, $V_{GS} = 10\text{ V}$, $V_{DD} = 20\text{ V}$	--	24.6	48	ns
t_r	Rise Time ^{3,4}		--	62.8	120	ns
$t_{d(off)}$	Turn-Off Delay Time ^{3,4}		--	224	440	ns
t_f	Fall Time ^{3,4}		--	162	320	ns

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
I_S	Continuous Source Current	$V_G = V_D = 0\text{ V}$, Force Current	--	--	140	A
I_{SM}	Pulsed Source Current		--	--	280	A
V_{SD}	Diode Forward Voltage	$V_{GS} = 0\text{ V}$, $I_S = 1\text{ A}$, $T_J = 25^\circ\text{C}$	--	--	1	V
t_{rr}	Reverse Recovery Time	$V_{GS} = 0\text{ V}$, $I_S = 1\text{ A}$, $di/dt = 100\text{ A}/\mu\text{s}$, $T_J = 25^\circ\text{C}$	--	32	--	ns
Q_{rr}	Reverse Recovery Charge		--	19	--	nC


Note :

- 1.Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. $V_{DD} = 25\text{ V}$, $V_{GS} = 10\text{ V}$, $L = 1\text{ mH}$, $I_{AS} = 8\text{ A}$, $R_G = 25\ \Omega$, Starting $T_J = 25^\circ\text{C}$.
3. The data tested by pulsed , pulse width $\leq 300\ \mu\text{s}$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.

MSC49N02X

N-Channel 40V MOSFETs


■ Characteristics Curve

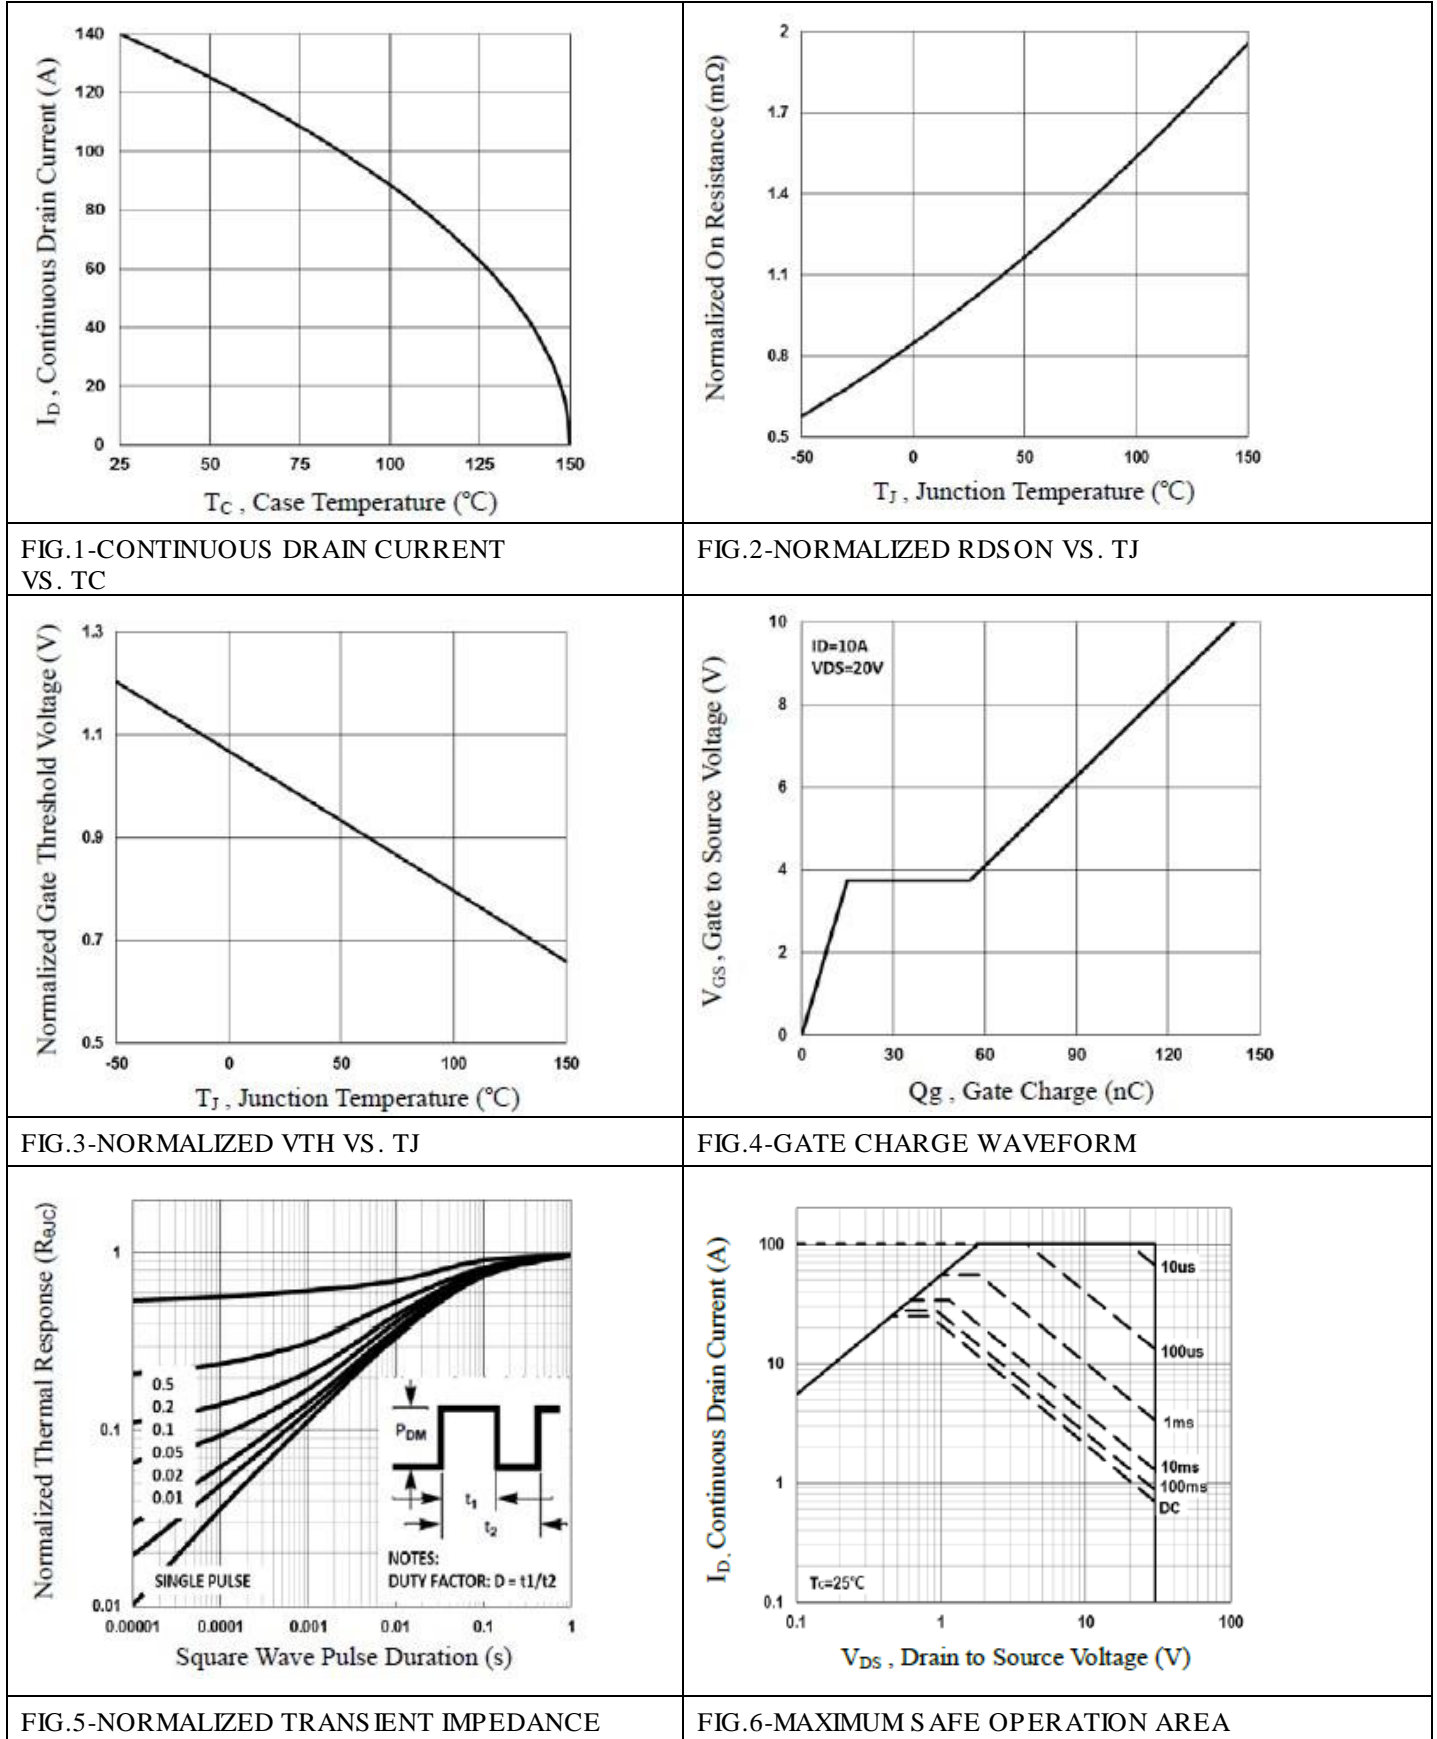

MSC49N02X

N-Channel 40V MOSFETs

■ Characteristics Curve

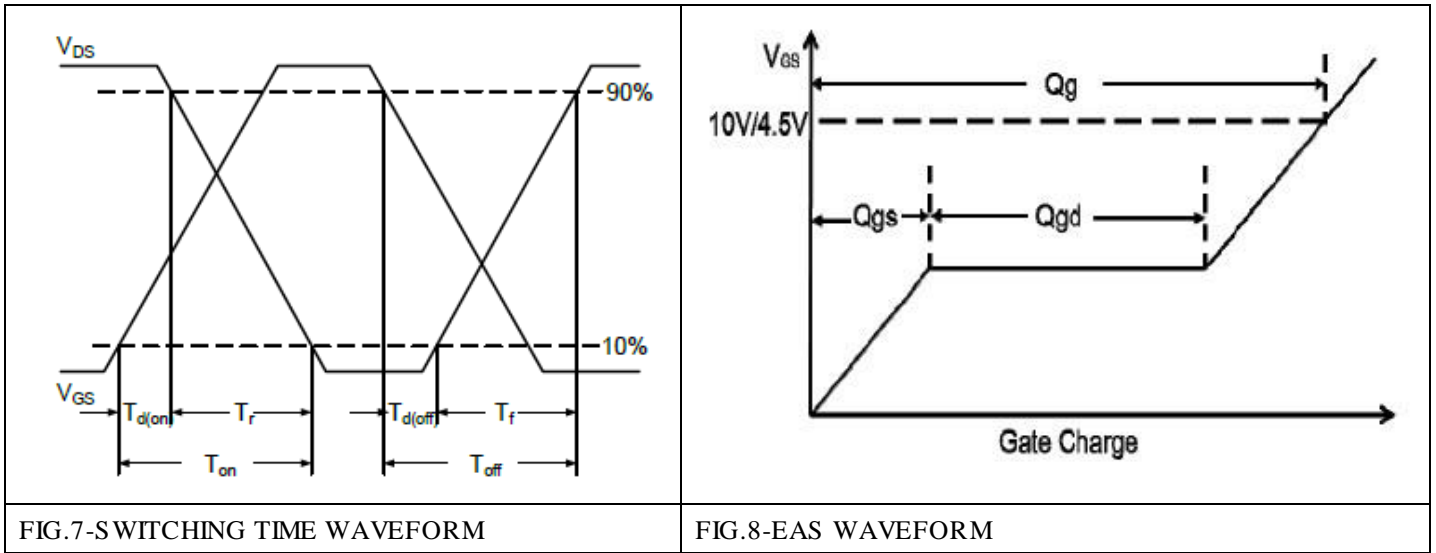

MSC49N02X

N-Channel 40V MOSFETs

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE

WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.