

MSD30P06

P-Channel 60-V (D-S) MOSFET

Description

The MSD30P06 is a N-channel enhancement-mode MOSFET, providing the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost effectiveness. The TO-252 package is universally preferred for all commercial-industrial applications

Features




- Low RDS(on) provides higher efficiency and extends battery life
- Low thermal impedance copper lead frame DPAK saves board space
- Fast switching speed
- High performance trench technology
- RoHS compliant package

Package type : TO-252

Packing & Order Information


Part No./ T : 2,500/Reel

Part No./ R : 80/Tube , 4,000/Box

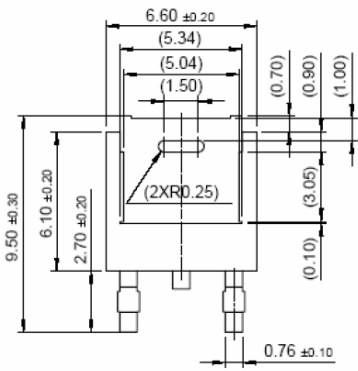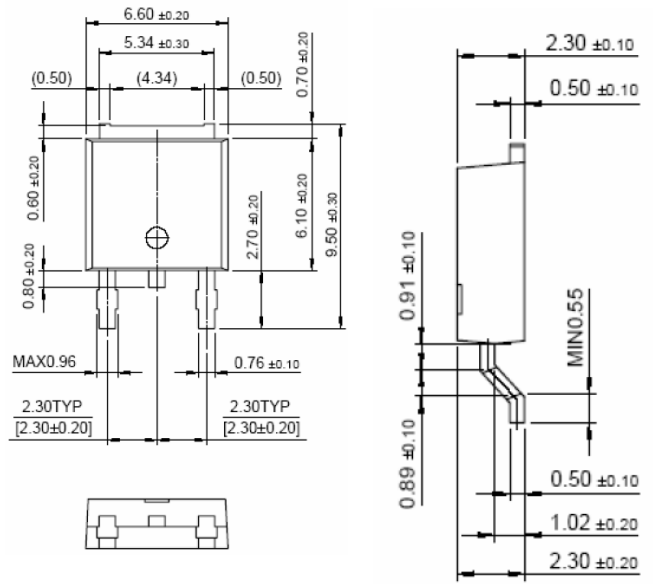

**RoHS
COMPLIANT**

Graphic symbol



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings (Tc=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{DS}	Drain-Source Voltage	-60	V
V _{GS}	Gate-Source Voltage	±20	V
I _D	Continuous Drain Current @ TC=25°C	28	A
I _{DM}	Pulsed Drain Current	±50	A
I _S	Continuous Source Current (Diode Conduction)	-30	A

MSD30P06

P-Channel 60-V (D-S) MOSFET

Absolute Maximum Ratings (Tc=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
P _w	Power Dissipation (TC=25°C)	50	W
T _J /T _{STG}	Operating Junction and Storage Temperature	-55 to +175	°C

Note:

1. Repetitive rating; pulse width limited by maximum junction temperature.

Thermal Characteristics (Tc=25°C unless otherwise noted)

Symbol	Parameter	Maximum	Units
R _{θJC}	Maximum Junction-to-Case	3.0	°C/W
R _{θJA}	Maximum Junction-to-Ambient	50	

Static Characteristics

Symbol	Test Conditions	Min	Typ.	Max.	Units
V _{GS}	V _{DS} = V _{GS} , I _D = 250μA	-1.0	--	--	V
R _{DS(ON)}	V _{GS} = -10 V, I _D = 28 A V _{GS} = -4.5 V, I _D = -24 A	--	--	54 69	mΩ
I _{DSS}	V _{DS} = -48 V, V _{GS} = 0 V V _{DS} = -48 V, V _{GS} = 0 V, T _J = 55°C	--	--	-1 -10	uA
I _{D(ON)}	V _{DS} = -5 V, V _{GS} = -10 V	-20	--	--	A
I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V	--	--	±100	nA
G _{fs}	V _{DS} = -15 V, I _D = -28 A	--	8	--	S
VSD	I _S = 2.5 A, V _{GS} = 0 V	--	--	-1.2	V

Dynamic Characteristics

Symbol	Test Conditions	Min	Typ.	Max.	Units
t _{d(on)}	V _{DD} = -30 V, I _D = -1.0 A, R _L = 30ohm, V _{GEN} = -10 V	--	8	--	ns
t _r		--	10	--	ns
t _{d(off)}		--	35	--	ns
t _f		--	12	--	ns
Q _g	V _{DS} = -30 V, I _D = -2.8 A, V _{GS} = -4.5 V	--	18	--	nC
Q _{gs}		--	5	--	nC
Q _{gd}		--	2	--	

MSD30P06

P-Channel 60-V (D-S) MOSFET

Characteristics Curve

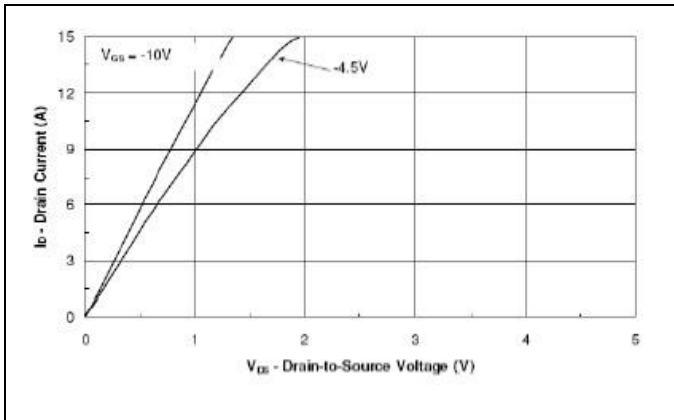


FIG.1-OUTPUT CHARACTERISTICS

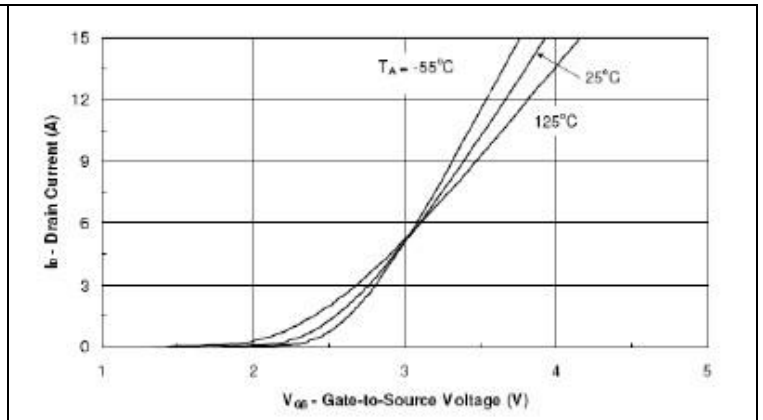


FIG.2-TRANSFER CHARACTERISTICS

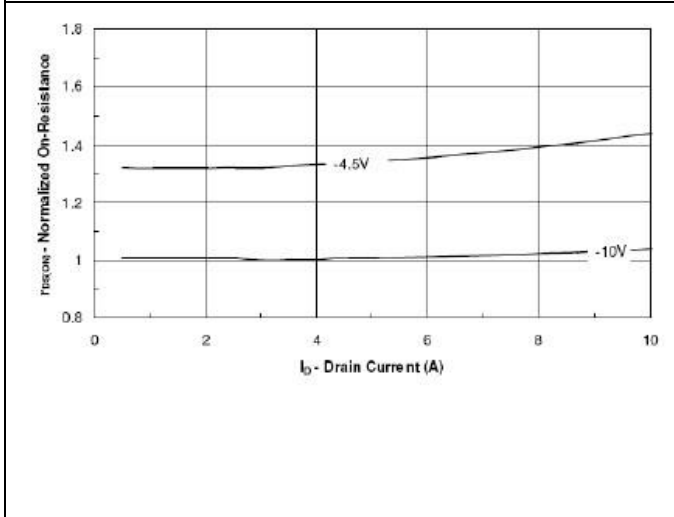


FIG.3-ON RESISTANCE VS DRAIN CURRENT

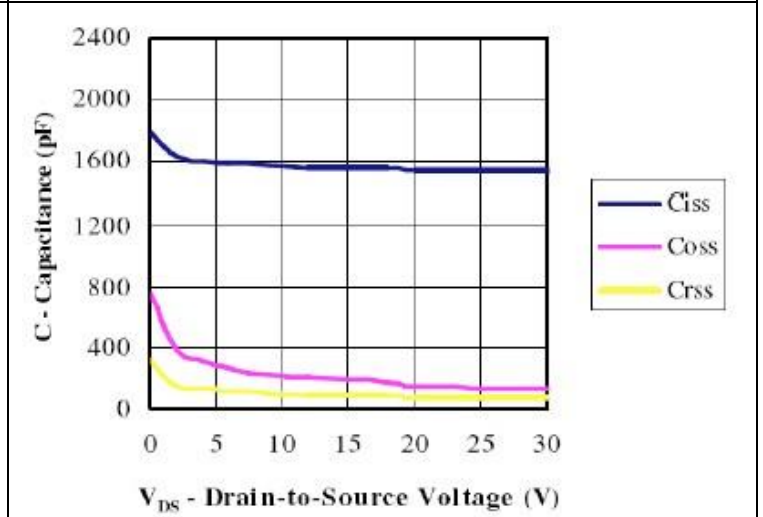


FIG.4-CAPACITANCE

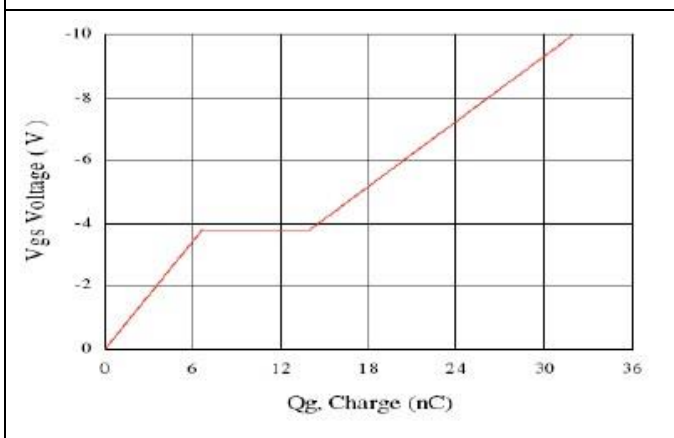


FIG.5-GATE CHARGE

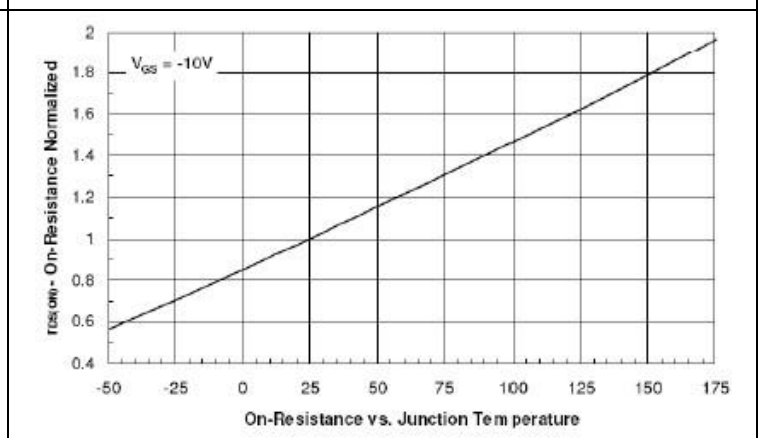


FIG.6-ON-RESISTANCE VS. JUNCTION TEMPERATURE

MSD30P06

P-Channel 60-V (D-S) MOSFET

Characteristics Curve

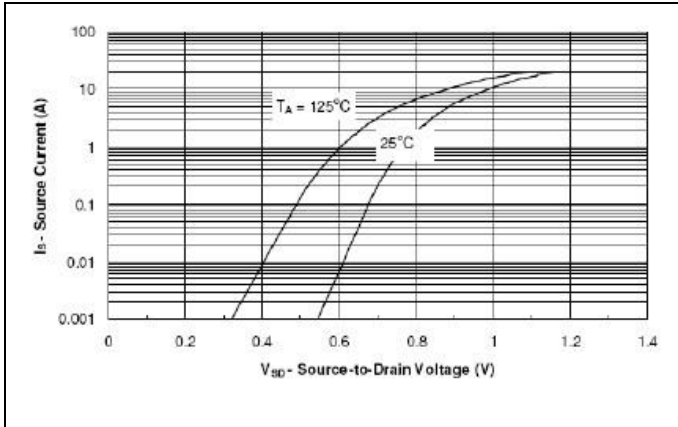


FIG. 7-SOURCE-DRAIN DIODE FORWARD VOLTAGE

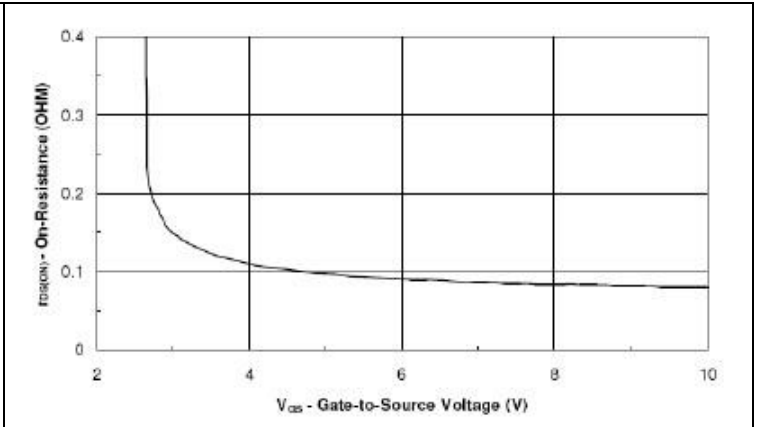


FIG. 8-ON-RESISTANCE VS GATE-TO SOURCE VOLTAGE

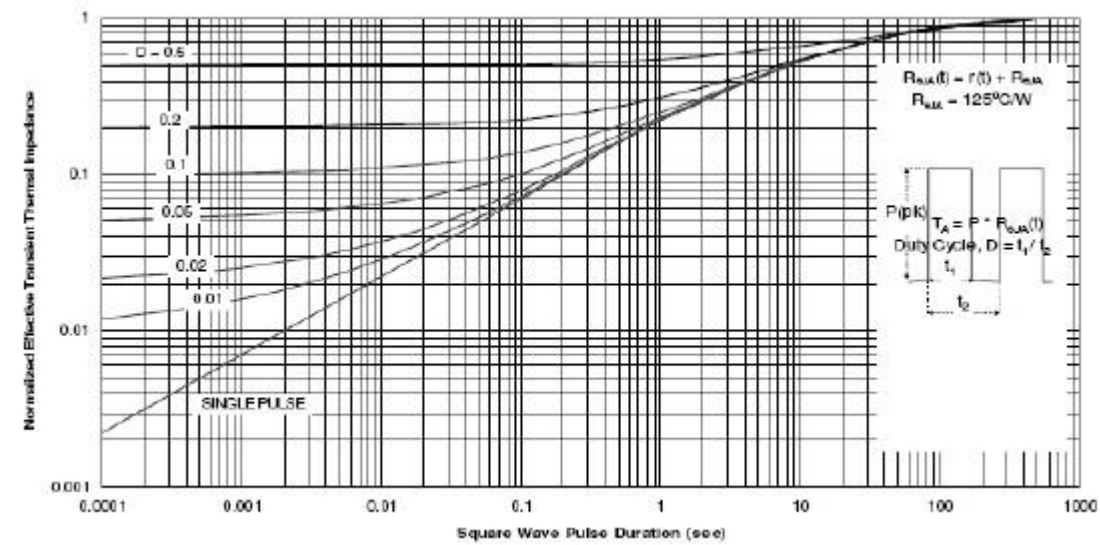
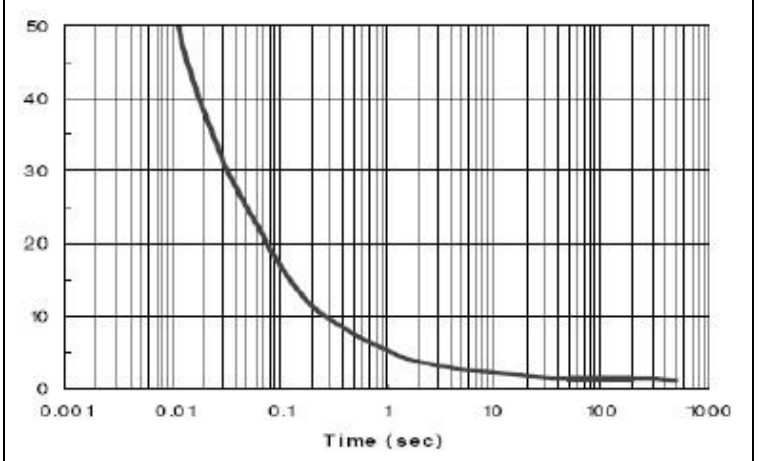
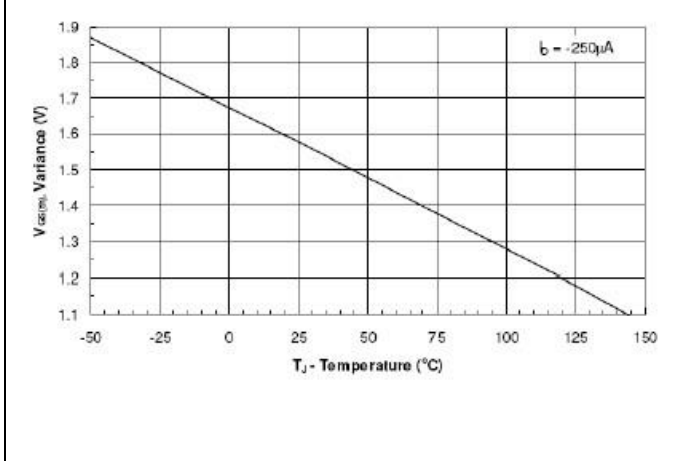


FIG. 11-TRANSIENT THERMAL RESPONSE CURVE

MS D30P06

P-Channel 60-V (D-S) MOSFET

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE

WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.