

P6KE6.8C-600CA

VBR : 6.8 - 600 Volts

PPK : 600 Watts

Features

- Glass passivated junction chip
- 600W surge capability at 1ms
- Excellent clamping capability
- Low zener impedance
- Fast response time : typically less than 1.0 ps from 0 volt to VBR(min.)
- Typical IR less than 1μA above 10V
- RoHS compliant package

Applications

- For Bi-directional use C or CA Suffix
- Electrical characteristics apply in both directions

Mechanical Data

- Case : DO-15 Molded plastic
- Epoxy : UL94V-0 rate flame retardant
- Lead : Axial lead solderable per MIL-STD-202, method 208 guaranteed
- Polarity : Color band denotes cathode end
- Mounting position : Any
- Weight : 0.4 gram

Packing & Order Information

3,000/T




RoHS
COMPLIANT

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Rating at 25 °C ambient temperature unless otherwise specified.

Symbol	Parameter	Value	Unit
PPK	Peak Power Dissipation at Ta = 25°C, Tp=1ms (Note 1)	Minimum 600	W
PD	Steady State Power Dissipation at TL = 75 °C	5.0	W
IFSM	Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method) (Note 3) IFSM 100 Amps.	100	A
TJ, TSTG	Operating and Storage Temperature Range	-65 to + 175	°C

DO-15

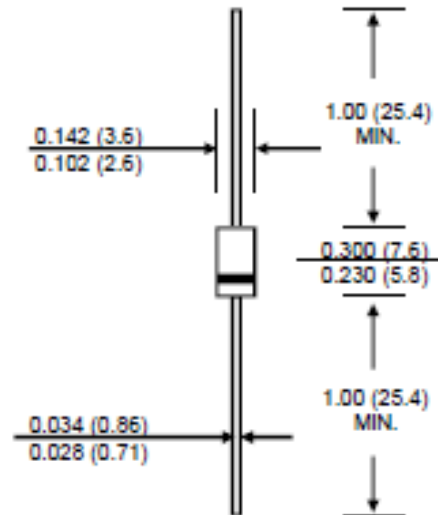

Graphic symbol



P6KE6.8C-600CA

VBR : 6.8 - 600 Volts

PPK : 600 Watts

Notes:

(1) Non-repetitive Current pulse, per Fig. 5 and derated above $T_a = 25^\circ\text{C}$ per Fig. 1

(2) Mounted on copper Lead area at 1.57 in^2 (40 mm^2).

ELECTRICAL CHARACTERISTICS (Rating at 25°C ambient temperature unless otherwise specified)

Type No.	Breakdown Voltage @ I_t (Note 1)		Working Peak Reverse Voltage VRWM	Maximum Reverse Leakage @ VRWM IR	Maximum Reverse Current IRSM	Maximum Clamping Voltage @ IRSM VRSM	Maximum Temperature Co-efficient of VBR (% / $^\circ\text{C}$)	
	VBR (V)							I_t (mA)
	Min	Max	(V)	(μA)	(A)	(V)	(% / $^\circ\text{C}$)	
P6KE6.8C	6.12	7.48	10	5.50	1000	38.0	10.8	0.057
P6KE6.8CA	6.45	7.14	10	5.80	1000	40.0	10.5	0.057
P6KE7.5C	6.75	8.25	10	6.05	500	36.0	11.7	0.061
P6KE7.5CA	7.13	7.88	10	6.40	500	37.0	11.3	0.061
P6KE8.2C	7.38	9.02	10	6.63	200	33.0	12.5	0.065
P6KE8.2CA	7.79	8.61	10	7.02	200	35.0	12.1	0.065
P6KE9.1C	8.19	10.0	1.0	7.37	50	30.0	13.8	0.068
P6KE9.1CA	8.65	9.55	1.0	7.78	50	31.0	13.4	0.068
P6KE10C	9.00	11.0	1.0	8.10	10	28.0	15.0	0.073
P6KE10CA	9.50	10.5	1.0	8.55	10	29.0	14.5	0.073
P6KE11C	9.90	12.1	1.0	8.92	5.0	26.0	16.2	0.075
P6KE11CA	10.5	11.6	1.0	9.40	5.0	27.0	15.6	0.075
P6KE12C	10.8	13.2	1.0	9.72	5.0	24.0	17.3	0.078
P6KE12CA	11.4	12.6	1.0	10.2	5.0	25.0	16.7	0.078
P6KE13C	11.7	14.3	1.0	10.5	5.0	22.0	19.0	0.081
P6KE13CA	12.4	13.7	1.0	11.1	5.0	23.0	18.2	0.081
P6KE15C	13.5	16.5	1.0	12.1	5.0	19.0	22.0	0.084
P6KE15CA	14.3	15.8	1.0	12.8	5.0	20.0	21.2	0.084
P6KE16C	14.4	17.6	1.0	12.9	5.0	18.0	23.5	0.086
P6KE16CA	15.2	16.8	1.0	13.6	5.0	19.0	22.5	0.086
P6KE17C	15.3	18.7	1.0	13.7	5.0	17.0	25.0	0.087
P6KE17CA	16.2	17.9	1.0	14.5	5.0	18.0	24.0	0.087
P6KE18C	16.2	19.8	1.0	14.5	5.0	16.0	26.5	0.088
P6KE18CA	17.1	18.9	1.0	15.3	5.0	17.0	25.5	0.088
P6KE20C	18.0	22.0	1.0	16.2	5.0	14.0	29.1	0.090
P6KE20CA	19.0	21.0	1.0	17.1	5.0	15.0	27.7	0.090

P6KE6.8C-600CA

VBR : 6.8 - 600 Volts

PPK : 600 Watts

ELECTRICAL CHARACTERISTICS (Rating at 25°C ambient temperature unless otherwise specified)

Type No.	Breakdown Voltage @ It (Note 1)		Working Peak Reverse Voltage VRWM (V)	Maximum Reverse Leakage @ VRWM (µA)	Maximum Reverse Current IRSM (A)	Maximum Clamping Voltage @ IRSM VRSM (V)	Maximum Temperature Co-efficient of VBR (% / °C)	
	VBR (V)							It (mA)
	Min	Max						
P6KE22C	19.8	24.2	1.0	17.8	5.0	13.0	31.9	0.092
P6KE22CA	20.9	23.1	1.0	18.8	5.0	14.0	30.6	0.092
P6KE24C	21.6	26.4	1.0	19.4	5.0	12.0	34.7	0.094
P6KE24CA	22.8	25.2	1.0	20.5	5.0	13.0	33.2	0.094
P6KE27C	24.3	29.7	1.0	21.8	5.0	11.0	39.1	0.096
P6KE27CA	25.7	28.4	1.0	23.1	5.0	11.2	37.5	0.096
P6KE30C	27.0	33.0	1.0	24.3	5.0	10.0	43.5	0.097
P6KE30CA	28.5	31.5	1.0	25.6	5.0	10.0	41.4	0.097
P6KE33C	29.7	36.6	1.0	26.8	5.0	9.0	47.7	0.098
P6KE33CA	31.4	34.7	1.0	28.2	5.0	9.0	45.7	0.098
P6KE36C	32.4	39.6	1.0	29.1	5.0	8.0	52.0	0.099
P6KE36CA	34.2	37.8	1.0	30.8	5.0	8.4	49.9	0.099
P6KE39C	35.1	42.9	1.0	31.6	5.0	7.4	56.4	0.100
P6KE39CA	37.1	41.0	1.0	33.3	5.0	7.8	53.9	0.100
P6KE43C	38.7	47.3	1.0	34.8	5.0	6.8	61.9	0.101
P6KE43CA	40.9	45.2	1.0	36.8	5.0	7.1	59.3	0.101
P6KE47C	42.3	51.7	1.0	38.1	5.0	6.2	67.8	0.101
P6KE47CA	44.7	49.4	1.0	40.2	5.0	6.5	64.8	0.101
P6KE51C	45.9	56.1	1.0	41.3	5.0	5.7	73.5	0.102
P6KE51CA	48.5	53.6	1.0	43.6	5.0	6.0	70.1	0.102
P6KE56C	50.4	61.6	1.0	45.4	5.0	5.2	80.5	0.103
P6KE56CA	53.2	58.8	1.0	47.8	5.0	5.5	77.0	0.103
P6KE62C	55.8	68.2	1.0	50.2	5.0	4.7	89.0	0.104
P6KE62CA	58.9	65.1	1.0	53.0	5.0	5.0	85.0	0.104
P6KE68C	61.2	74.8	1.0	55.1	5.0	4.3	98.0	0.104
P6KE68CA	64.6	71.4	1.0	58.1	5.0	4.6	92.0	0.104
P6KE75C	67.5	82.5	1.0	60.7	5.0	3.9	108	0.105
P6KE75CA	71.3	78.8	1.0	64.1	5.0	4.1	103	0.105
P6KE82C	73.8	90.2	1.0	66.4	5.0	3.6	118	0.105

P6KE6.8C-600CA

VBR : 6.8 - 600 Volts

PPK : 600 Watts

ELECTRICAL CHARACTERISTICS (Rating at 25°C ambient temperature unless otherwise specified)

Type No.	Breakdown Voltage @ It (Note 1)		Working Peak Reverse Voltage VRWM (V)	Maximum Reverse Leakage @ VRWM (µA)	Maximum Reverse Current (A)	Maximum Clamping Voltage @ IRSM (V)	Maximum Temperature Co-efficient of VBR (% / °C)	
	VBR (V)	It (mA)						
	Min	Max						
P6KE82CA	77.9	86.1	1.0	70.1	5.0	3.7	113	0.105
P6KE91C	81.9	100	1.0	73.7	5.0	3.2	131	0.106
P6KE91CA	86.5	95.5	1.0	77.8	5.0	3.4	125	0.106
P6KE100C	90.0	110	1.0	81.0	5.0	2.9	144	0.106
P6KE100CA	95.0	105	1.0	85.5	5.0	3.1	137	0.106
P6KE110C	99.0	121	1.0	89.2	5.0	2.7	158	0.107
P6KE110CA	105	116	1.0	91.0	5.0	2.8	152	0.107
P6KE120C	108	132	1.0	97.2	5.0	2.4	173	0.107
P6KE120CA	114	126	1.0	102	5.0	2.5	165	0.107
P6KE130C	117	143	1.0	105	5.0	2.2	187	0.107
P6KE130CA	124	137	1.0	111	5.0	2.3	179	0.107
P6KE150C	135	165	1.0	121	5.0	2.0	215	0.108
P6KE150CA	143	158	1.0	128	5.0	2.0	207	0.108
P6KE160C	144	176	1.0	130	5.0	1.8	230	0.108
P6KE160CA	152	168	1.0	136	5.0	1.9	219	0.108
P6KE170C	153	187	1.0	138	5.0	1.7	244	0.108
P6KE170CA	162	179	1.0	145	5.0	1.8	234	0.108
P6KE180C	162	198	1.0	146	5.0	1.6	258	0.108
P6KE180CA	171	189	1.0	154	5.0	1.7	246	0.108
P6KE200C	180	220	1.0	162	5.0	1.5	287	0.108
P6KE200CA	190	210	1.0	171	5.0	1.53	274	0.108
P6KE220C	198	242	1.0	175	5.0	1.16	344	0.108
P6KE220CA	209	231	1.0	185	5.0	1.22	328	0.108
P6KE250C	225	275	1.0	202	5.0	1.11	360	0.110
P6KE250CA	237	263	1.0	214	5.0	1.16	344	0.110
P6KE300C	270	330	1.0	243	5.0	0.93	430	0.110
P6KE300CA	285	315	1.0	256	5.0	0.97	414	0.110
P6KE350C	315	385	1.0	284	5.0	0.79	504	0.110
P6KE350CA	332	368	1.0	300	5.0	0.83	482	0.110

P6KE6.8C-600CA

VBR : 6.8 - 600 Volts

PPK : 600 Watts

ELECTRICAL CHARACTERISTICS (Rating at 25°C ambient temperature unless otherwise specified)

Type No.	Breakdown Voltage @ It (Note 1)			Working Peak Reverse Voltage VRWM	Maximum Reverse Leakage @ VRWM IR	Maximum Reverse Current IRSM	Maximum Clamping Voltage @ IRSM VRSM	Maximum Temperature Co-efficient of VBR (% / °C)
	VBR (V)		It (mA)					
	Min	Max		(V)	(μ A)	(A)	(V)	
P6KE400C	360	440	1.0	324	5.0	0.70	574	0.110
P6KE400CA	380	420	1.0	342	5.0	0.73	548	0.110
P6KE440C	396	484	1.0	356	5.0	0.95	631	0.110
P6KE440CA	418	462	1.0	376	5.0	1.00	602	0.110
P6KE480C	432	528	1.0	389	5.0	0.88	686	0.110
P6KE480CA	456	504	1.0	408	5.0	0.90	658	0.110
P6KE510C	459	561	1.0	413	5.0	0.82	729	0.110
P6KE510CA	485	535	1.0	434	5.0	0.86	698	0.110
P6KE530C	477	583	1.0	457	5.0	0.76	798	0.110
P6KE530CA	503	556.5	1.0	477	5.0	0.80	725	0.110
P6KE540C	486	594	1.0	437	5.0	0.78	772	0.110
P6KE540CA	513	567	1.0	459	5.0	0.81	740	0.110
P6KE550C	495	605	1.0	470	5.0	0.76	836	0.110
P6KE550CA	522.5	577.5	1.0	495	5.0	0.80	760	0.110
P6KE600C	540	660	1.0	490	5.0	0.71	911	0.110
P6KE600CA	570	630	1.0	512	5.0	0.75	828	0.110

Note:


- (1) VBR measured after It applied for 300 μ s., It = square wave pulse or equivalent.
- (2) "6KE" will be omitted in marking on the diode.

P6KE6.8C-600CA

VBR : 6.8 - 600 Volts

PPK : 600 Watts

■ RATING AND CHARACTERISTIC CURVES (P6KExxC SERIES)

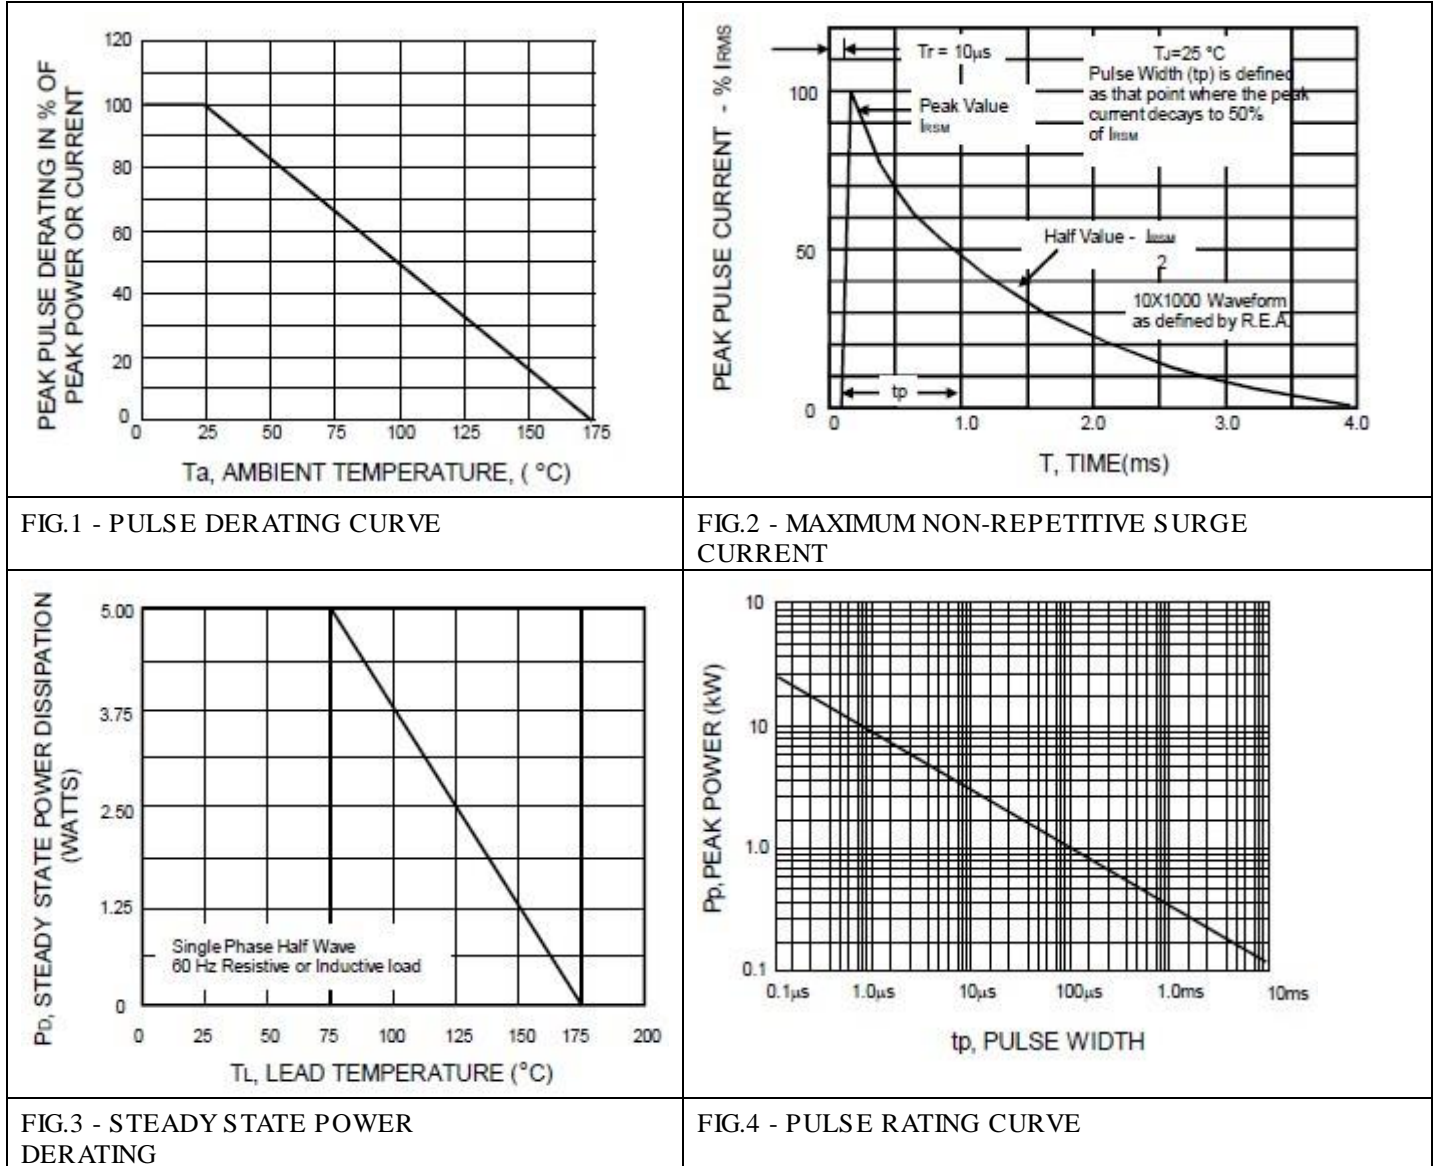

P6KE6.8C-600CA

VBR : 6.8 - 600 Volts

PPK : 600 Watts

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE

WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.