

SD14ST

Product profile

Surface Mount High Current Density Schottky

General description


Rectifiers 1.0 Amp 40V

Features

- Guarding protection
- Low forward voltage
- Reverse energy tested
- High current capability
- Extremely low thermal resistance

Mechanical data

- Case: SOD-123 Molded plastic
- Epoxy: UL94V-O rate flame retardant
- Lead: Lead Formed for Surface Mount
- Polarity: Color band denotes cathode end
- Mounting position: Any

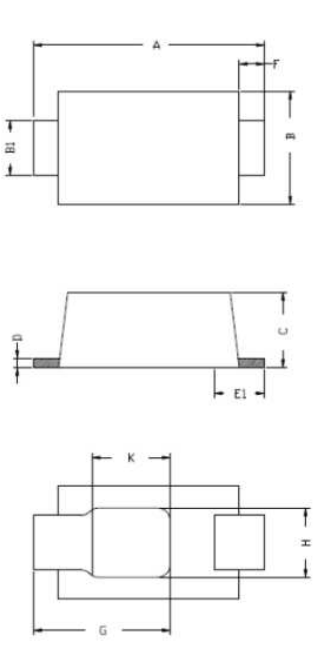	Dimension	Millimeters	
		Min	Max
A	3.55	3.85	
B	1.60	2.00	
B1	0.80	1.00	
C	0.85	0.95	
D	0.12	0.20	
E1	0.60	1.00	
F	0.20	0.60	
K	1.05	1.45	
H	0.90	1.30	
G	2.05	2.45	

Maximum Ratings (Tc=25°C unless otherwise noted)

Parameter	Symbol	SD14ST	Unit
Maximum repetitive peak reverse voltage	VRRM	40	V
RMS Voltage (Max.)	VRMS	28	V
Working peak reverse voltage	VRWM	40	V
Maximum average forward rectified current	IF(AV)	1.0	A
Peak forward surge current	IFSM	30	A
8.3ms single half sine-wave superimposed on rated load (JEDEC Method) 1 pulse/4S t=500us exponent wave		180	
Operating junction temperature range	TJ	-55 to +125	°C
Storage temperature range	TSTG	-55 to +150	°C

THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Unit
Typical thermal resistance	RθJA	42	°C/W

Notes:

- (1) Pulse test: 300 μs pulse width, 1 % duty cycle
- (2) Pulse test: Pulse width ≤ 40 ms

SD14ST

Electrical characteristics (Tc=25°C unless otherwise noted)

OFF CHARACTERISTICS

Parameter	Symbol	Value		Unit
		Typical	Max	
Instantaneous forward voltage at IF=1A, Tj=25°C	VF	0.48	0.50	V
Maximum reverse current Tj=25°C	IR	200		u'A
at working peak reverse voltage Tj=125°C		20		m'A
Junction Capacitance @ DC 5V	CJ	230		pF

DEVICE MARK

SD14ST

SD14ST

■ Characteristic Curves

FIG. 1 FORWARD DERATING CURVE

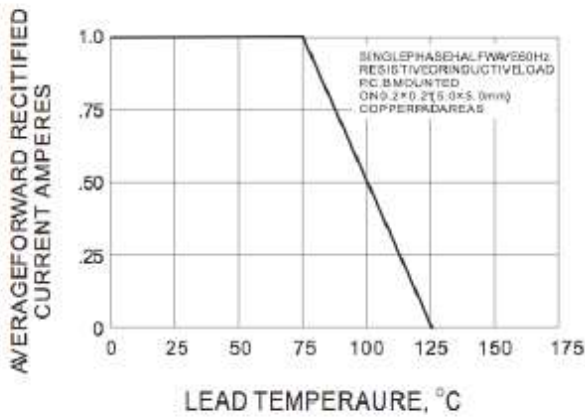


FIG. 2 TYPICAL JUNCTION CHARACTERISTIC

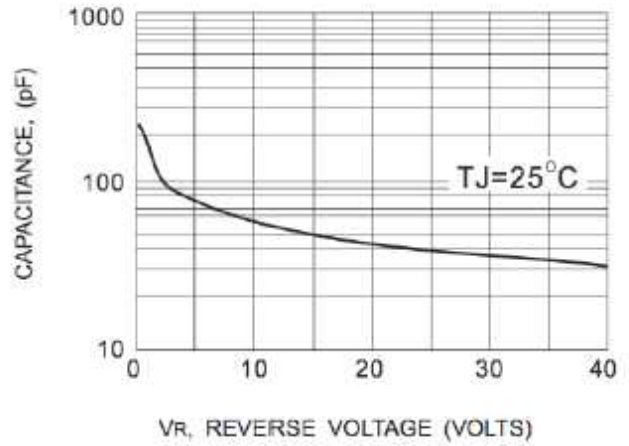


FIG. 3 TYPICAL REVERSE CHARACTERISTICS


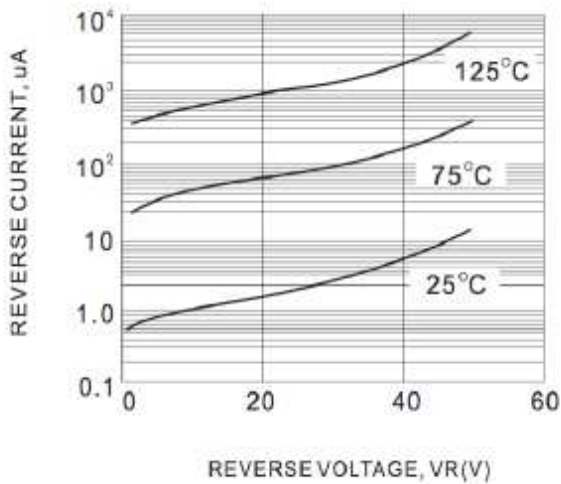


FIG. 4 TYPICAL FORWARD CHARACTERISTICS

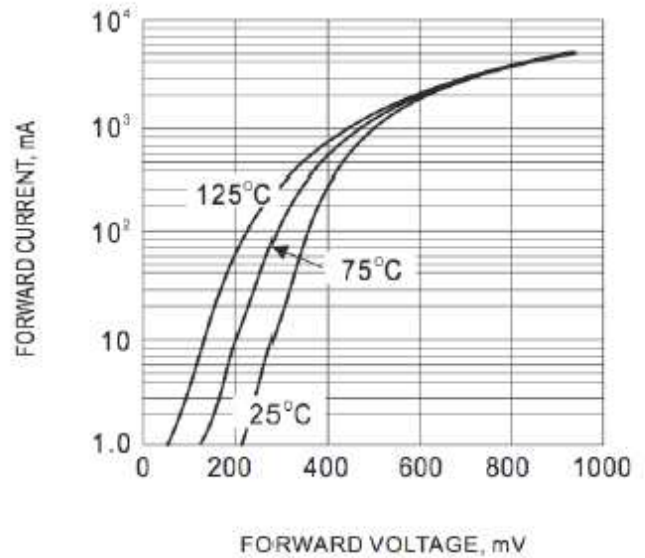

SD14ST

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE. Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.